Jetson M1





Jetson M1

A one-person pod, ideal as a tranquil spot for solo, hands-on work. A cozy, soundproof oasis where you can focus and get things done.

Jetson is a family of universal acoustic pods designed to make everyone's work joyful and fruitful. It's truly people-focused: comfortable and customizable through add-on sets to meet your need and vision. Made of extruded aluminum, which makes it the lightest and most environmentally-friendly pod on the market. With its durable construction, no-hassle assembly, effective sound attenuation, and attractive price, Jetson will introduce the benefits of acoustic pods to all.

FUNCTION

Videocall or focused work

ACOUSTICS

Insulation

USAGE


Open space

Reception

Breakout area

Other public spaces

Dimensions & weight

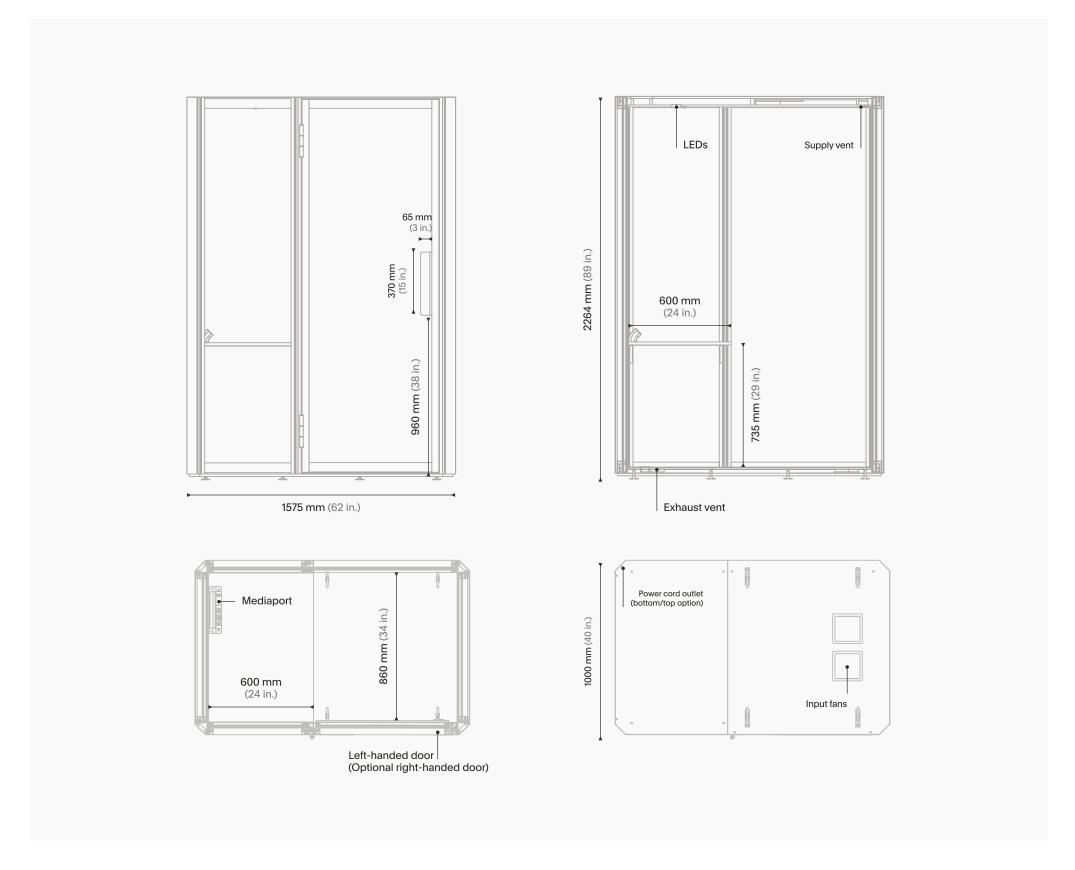

Pod

DIMENSIONS	EXTERIOR / INTERIOR	WEIGHT		
Width	1575 mm (62 in.) / 1435 mm (56 in.)	Pod weight	275 kg (606 lbs)	
Depth	1000 mm (40 in.) / 860 mm (34 in.) + 800 mm (32 in.) with an open door	Shipment weight	320 kg (706 lbs)	
Height	2264 mm (89 in.) / 2102 mm (83 in.) + 200 mm (7.9 in.) for ventilation + 36 mm (1.4 in.) with casters			

Packing (cartboard flat-packs - 9 layers)

DIMENSIONS		WEIGHT		
Width	2270 mm (89 in.)	Wooden pallet	29 kg (64 lbs)	
Depth	1270 mm (50 in.)	Plywood pallet	40 kg (88 lbs)	
Height	960 mm (38 in.)			
POSSIBILITY OF STOCKING				

Number of pods

2

Technical data

ACOUSTIC RESULTS

Reverberation time inside

 $\begin{array}{lll} \text{Speech level reduction} & D_{\text{S,A}} = 26,5 \text{ dB, class B, ISO } 23351\text{-}1 \\ \text{Range of level reduction D} & 16,9\text{-}35,5 \text{ dB } (125\text{-}8000 \text{ Hz}) \\ \text{Sound insulation} & \text{ISO } 10140\text{-}2 \\ & \text{Glass wall } (6 \text{ mm ESG}) & R_{\text{w}} = 33 \text{ dB, } R_{\text{A1}} = 32 \text{ dB} \\ & \text{Solid wall} & R_{\text{w}} = 38 \text{ dB, } R_{\text{A1}} = 36 \text{ dB} \\ \end{array}$

0,2 s (250-4000 Hz) - ISO 354:2005

VENTILATION

System airflow 65 m³/h

Nominal airflow 365 m³/h

Air change rate (ACPH) 24 / h

Fan emitted noise outside 36 dBA

Fan emitted noise inside 38 dBA

Ventilation operation Occupancy sensor, auto start/stop

24 V DC

POWER CONSUMPTION AND LIGHTING

Standby 5,7 W
Working (fan, LEDs) 40 W
Power supply voltage 220-240 VAC, 50-60 Hz
Light source 1416 mm LED strip
Brightness on the tabletop surface 400 lux
LED power consumption Max 26,6 W
LED supply voltage 24 V DC

Color temperature / brightness 4000 K / 1980 lm/m
Light control Occupancy sensor, auto start/stop

MEDIA PORT (FPD UNIT)

Fan supply voltage

Power supply voltage 220-240 VAC, 50-60 Hz

Power sockets in a mediaport 2

USB fast charger in a mediaport TUF A+C 30 W

Max load of power sockets 10 A

Mounting system Included, desk mount

LAN port Possibility to route the LAN cable

Available socket types FR / DE / UK / CH / AU / DK* / IT*

*The appearance of the media port may differ from that shown in the renderings. Parameters and features remain unchanged.

COMPOSITION

- Aluminium structure and steel elements
- Plywood and melamine faced chipboard
- Isolating and absorbing materials
- Tempered glass
- Felt

WARRANTY

We offer a 5-year warranty and a 5-year right to repair. What is more, Jetson is made entirely of easily replaceable components. So, if you ever do need to repair Jetson, it's quick, cheap, and simple.

CERTIFICATES AND TESTS

- ISO 14001, ISO 9001
- VOC (PN-EN ISO 16000-9) and Formaldehyde (EN 717-1:2006) tested
- Formaldehyde (EN 717-1:2006) tested
- Speech reduction tested acc. to ISO 23351-1:2020
- Reaction to fire tested acc. to EN-13501-1:2018













Equipment

STANDARD EQUIPMENT

- Ventilation system
- LED light 4000K
- · Occupancy sensor
- Media port with 2 power and A+C USB sockets

- Wall-mounted tabletop and wall hook
- Display rail, phone holder and magnet
- Power cord 3 m (118 in.)

ADDITIONAL EQUIPMENT

+ Monitor hanger

A flexible mounting system designed to accommodate screens of various sizes (VESA 100-200-300), providing an ergonomic and space-efficient solution for digital collaboration.

+ Occupancy light

An external indicator light that signals when the pod is in use. The light glows red when the pod is occupied and turns off when it is available.

+ LAN cable cat. 6a

A high-performance Ethernet cable that enables stable, high-speed internet connectivity, ensuring seamless communication and efficient workflow.

+ LED light 3000 K

A warm lighting option that enhances the ambiance, creating a cozy and inviting atmosphere inside the pod.

+ Control panel

A user-friendly interface that allows easy adjustment of lighting and ventilation, ensuring a personalized and comfortable workspace tailored to individual preferences.

+ Casters

Casters that provide effortless mobility, allowing the pod to be easily repositioned. When casters are installed, the pod's total height increases by 36 mm (1.4 in.).

Equipment dimensions and weight

TABLETOP

 Width
 600 mm (24 in.)

 Depth
 855 mm (34 in.)

 Height
 734 mm (29 in.)

 Weight
 6 kg (13 lbs)

 Total load
 20 kg (44 lbs)

MONITOR HANGER (ADDITIONAL)

 Width
 838 mm (33 in.)

 Height
 429 mm (17 in.)

 Total load
 50 kg (110 lbs)

DISPLAY RAIL

 Width
 838 mm (33 in.)


 Height
 75 mm (3 in.)

 Weight
 1,4 kg (3 lbs)

Add-on sets


Library Set

Weight: 6,5 kg (14 lbs) | With packaging: 8 kg (18 lbs)

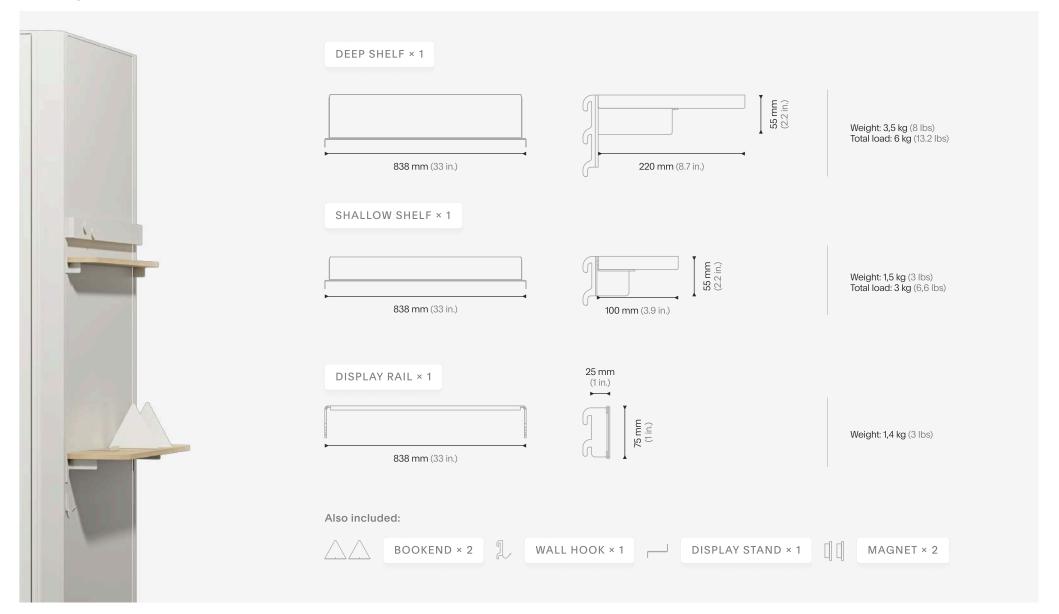

Note Set


Weight: 10 kg (22 lbs) | With packaging: 12 kg (26 lbs)

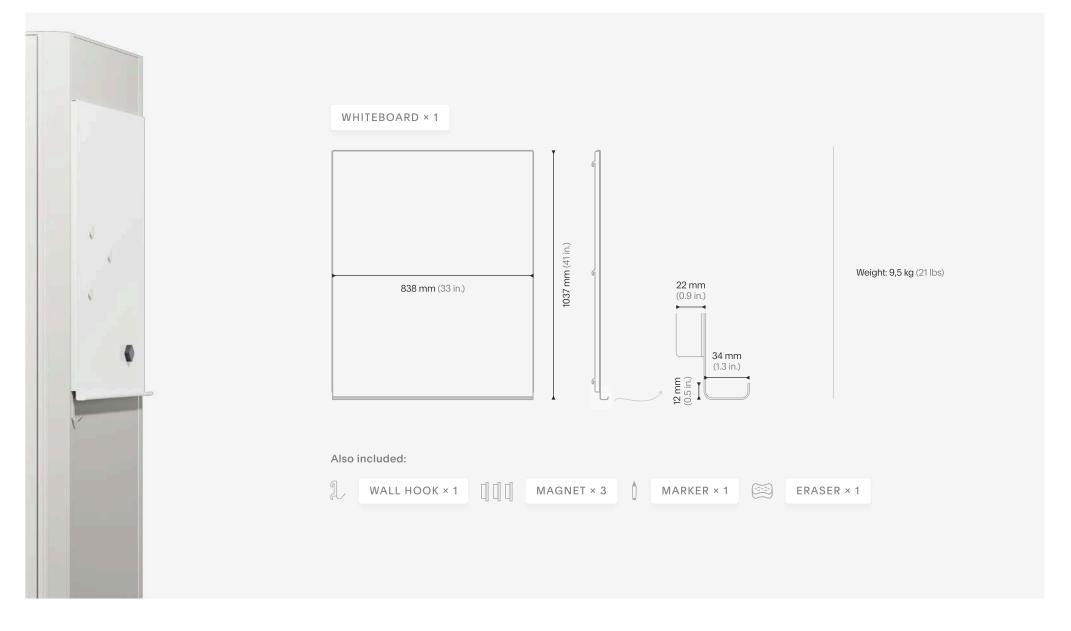

Jetson M1

Finishes overview



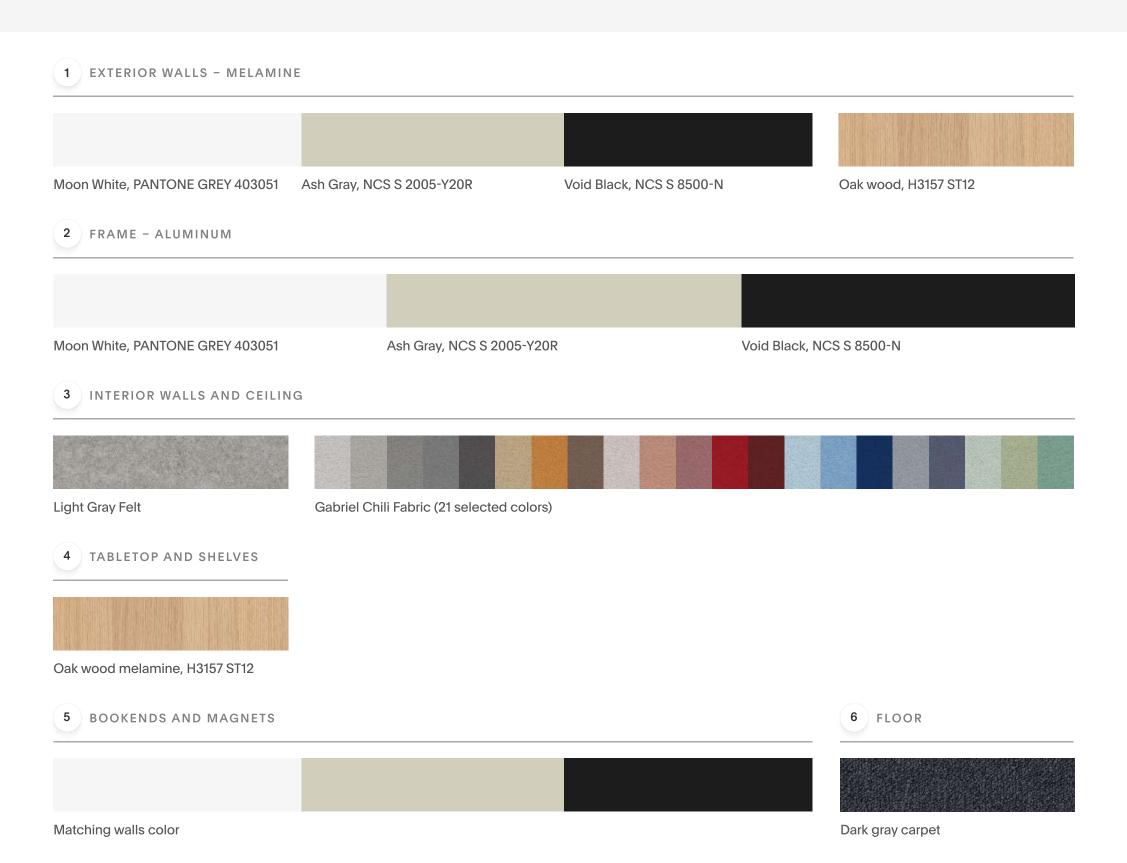

www.mute.design/jetson Mute © 2025 All rights reserved